



MEMS Flow Sensor D6F-P

User's Manual

MEMS Flow Sensor



Contents

1. Overview.....	2
2. Product lineup	2
3. Dimensions.....	2
3.1 PCB Implementation (Model: D6F-P0001A1/-P0010A1)	2
3.2 Connector (Model: D6F-P0010A2).....	3
3.3 Connector (Model: D6F-P0010AM2).....	3
3.4 Accessories (optional).....	4
4. Operating Principle.....	5
5. Features of Product.....	5
6. Main Specifications	6
6.1 Feature & Rating.....	6
6.2 Output Voltage Characteristics	7
7. Connection	8
7.1 Low flow rate measurement	8
7.2 High Flow Rate Measurement	9
7.3 Orifice Diameter	9
8. Troubleshooting	11
Warranty and Limited Warranty.....	12

This User's Manual describes usage of and interface with OMRON's MEMS flow sensor (D6F-P). It should be noted that this document is intended to supplement the datasheet, which should be referenced when using the sensor.

Table 1 shows the MEMS flow sensor (D6F-P) lineup and Table 2 accessories (optional).


Flow range	Port type	Connection	Model	
0 to 0.1 L/min	Bamboo	Implemented on PCB	D6F-P0001A1	
0 to 1 L/min		Connector	D6F-P0010A1	
			D6F-P0010A2	
Manifold	Connector	D6F-P0010AM2		

Type	Model
Cable	D6F-CABLE2
	D6F-CABLE2-L


3.1 PCB Implementation (Model: D6F-P0001A1/-P0010A1)



3.2 Connector (Model: D6F-P0010A2)

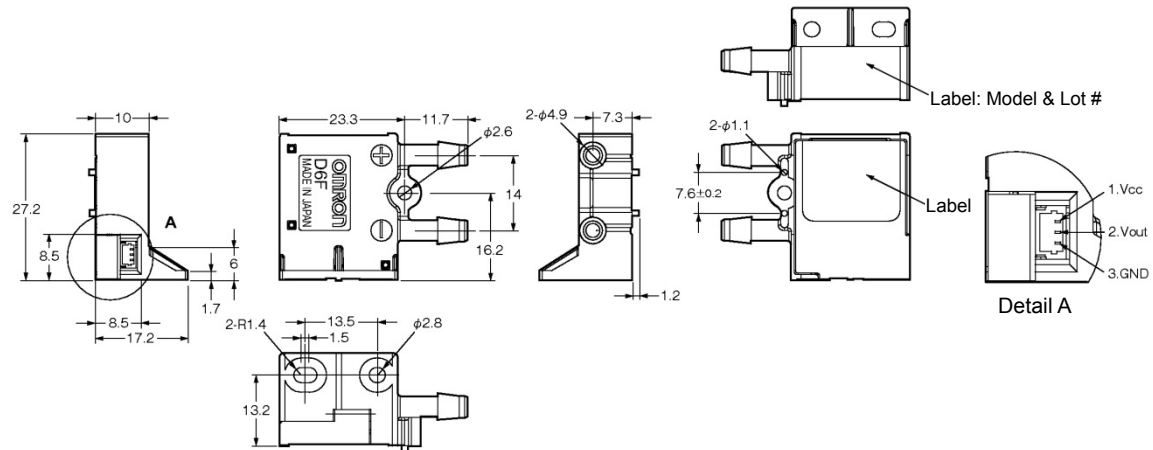

3.3 Connector (Model: D6F-P0010AM2)

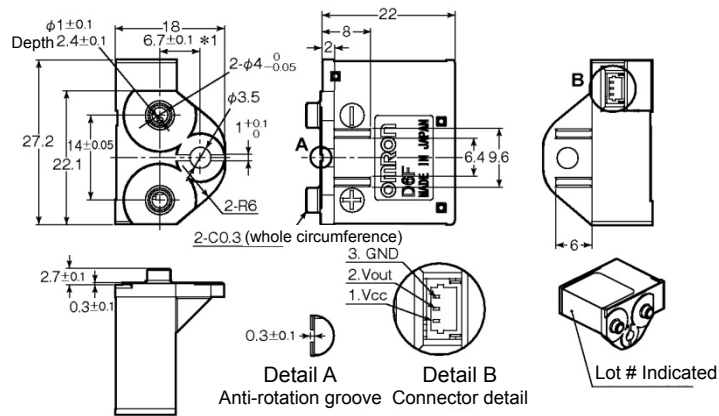

Use connectors of J.S.T. Mfg. Co., Ltd. for those that are connected to this product.

Press-fit connector


Socket : 03SR-3S
Wire : AWG#30

Crimping connector

Contacts : SSH-003T-P0.2
Housing : SHR-03V-S
Wire : AWG#32 to #28

3.4 Accessories (optional)

D6F-CABLE2

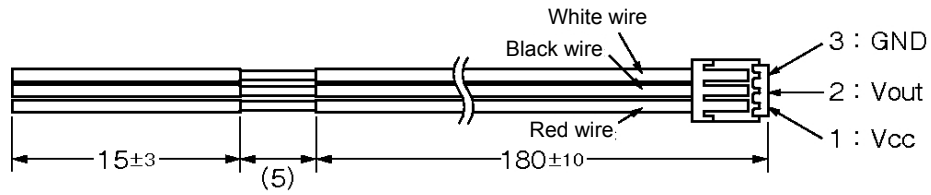

Contacts : SSH-003T-P0.2 (J.S.T. Mfg. Co., Ltd.)
Housing : SHR-03V-S (J.S.T. Mfg. Co., Ltd.)
Wire : AWG#30

D6F-CABLE2-L


A model with the total length of D6F-CABLE2 as 2000 (mm).

Contacts : SSH-003T-P0.2 (J.S.T. Mfg. Co., Ltd.)
Housing : SHR-03V-S (J.S.T. Mfg. Co., Ltd.)
Wire : AWG#30

4. Operating Principle

MEMS flow sensor (D6F-P) is a thermal mass flow sensor.

A silicon substrate has a heater and thermopiles on both sides of it on the thin film formed on the substrate, which detects heat transfer as changes of air flow on it to measure the flow rate.

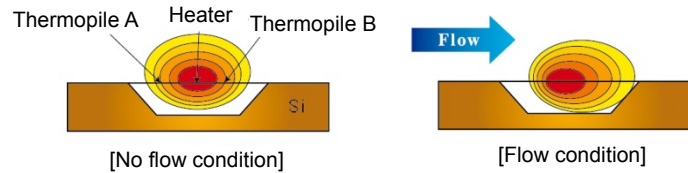

5. Features of Product

Micro-flow rate can be measured

By using a thermal mass flow method, OMRON's MEMS flow sensor (D6F-P) can measure low flow rate. (Measurement of flow rate from 0 to 0.1 L/min is available^{*1})

^{*1} In case of D6F-P0001A1

High dust resistance


Can be used in dusty environment by its structure (DSS^{*2}) that helps prevent dust in fluid from adhering to the sensor. (Avoid dust around the air inlet)

Lineup

Selection of two port types and two connection types available.

^{*2} DSS (Dust Segregation Structure)

Air coming from outside is divided into a spiral channel and a core channel. Dust is separated by the centrifugal force caused by the helical structure, and the sensor chip is supplied with a gas that contains almost no dust, which can reduce contamination.

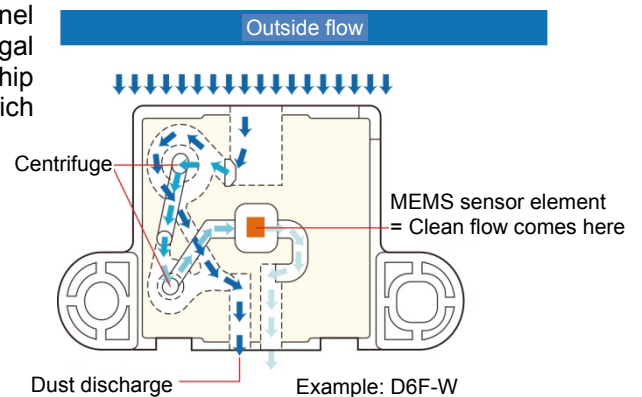

6. Main Specifications

6.1 Feature & Rating

Table 3 Main Features of D6F-P□□□□

Model	D6F-P0001A1	D6F-P0010A1	D6F-P0010A2	D6F-P0010AM2
Flow range*1	0 to 0.1 L/min	0 to 1 L/min		
Calibration Gas*2	Air			
Flow Port Type	Bamboo joint, maximum outside diameter: 4.9 mm, minimum outside diameter: 4.0 mm			Manifold
Electrical Connection	Lead terminal		Three-pin connector	
Power Supply	4.75 to 5.25 VDC			
Current Consumption	15 mA max. with no load and a Vcc of 5.0 V			
Output Voltage	0.5 to 2.5 VDC (Load resistance: 10kΩ)			
Accuracy	±5%FS (25°C characteristic)			
Repeatability*3	±1.0%FS	±0.4%FS		
Output voltage (Max.)	3.1 VDC (Load resistance: 10kΩ)			
Output voltage (Min.)	0 VDC (Load resistance: 10kΩ)			
Rated Power Supply Voltage	10 VDC			
Rated Output Voltage	4 VDC			
Case	PBT			
Degree of Protection	IEC IP40 (Excluding tubing sections.)			
Withstand Pressure *3	50 kPa			
Pressure Drop*3	0.005 kPa	0.19 kPa		0.67 kPa
Operating Temperature*4	−10 to +60°C			
Operating Humidity*4	35% to 85%			
Storage Temperature*4	−40 to +80°C			
Storage Humidity*4	35% to 85%			
Temperature Characteristics	±5% FS for 25°C characteristic at an ambient temperature of −10 to +60°C			
Insulation Resistance	Between Sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC)			
Dielectric Strength	Between Sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.)			
Weight	8.5 g		8.0 g	

*1. Volumetric flow rate at 0°C, 101.3 kPa.

*2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)

*3. Reference (typical)

*4. With no condensation or icing.

Casing material: PBT, flammability UL94 standard: V-0

6.2 Output Voltage Characteristics

D6F-P0001A1

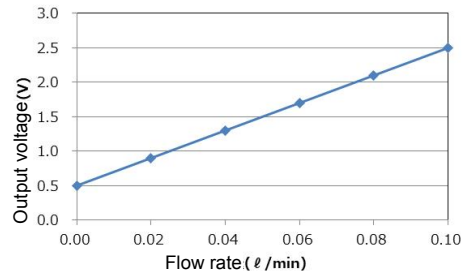


Table 4 Output characteristics of D6F-P0001A1

Flow rate L/min (Normal)	0	0.02	0.04	0.06	0.08	0.10
Output voltage (V)	0.50 ±0.10	0.90 ±0.10	1.30 ±0.10	1.70 ±0.10	2.10 ±0.10	2.50 ±0.10

D6F-P0010A1/-P0010A2/-P0010AM2

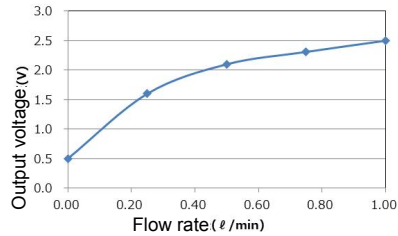



Table 5 D6F-P0010A1/-P0010A2/-P0010AM2

Flow rate L/min (Normal)	0	0.25	0.50	0.75	1.00
Output voltage (V)	0.50 ±0.10	1.60 ±0.10	2.10 ±0.10	2.31 ±0.10	2.50 ±0.10



7. Connection

7.1 Low flow rate measurement

To measure 0.1(L/min) using D6F-P0001A1 or 1(L/min) using D6F-P0010A1 or D6F-P0010A2, connect the sensor with the bamboo port directly to the tube.




It is recommended to use an urethane tube with inner diameter of $\Phi 4$ (mm) and outer diameter of $\Phi 6$ (mm).
The sensor should be placed so that its OMRON log mark should be facing up. (Left)

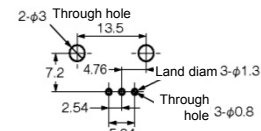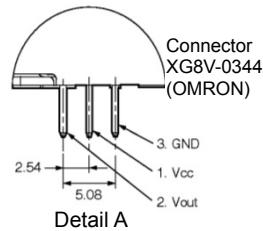


Recommended connector hole size (Back side)

Solder condition: Use a soldering iron with pressing force of 100g or less at temperature of 350°C for 5 seconds (for PCB implementation type only)


To measure 1(L/min) using D6F-P0010A2, connect the sensor with the manifold directly to the tube.

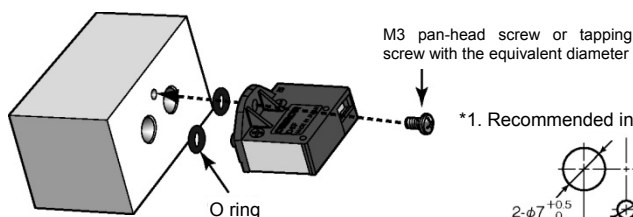

*1. Recommended installation size

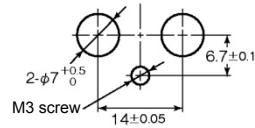

Recommended O ring hole processing size

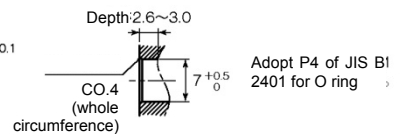


Fluid inlet and outlet must be sealed with an O ring for attachment.
The recommended O ring is designation P4 (JIS B2401).

Sensor installation


The sensor should be placed in the direction shown below, within a range of $\pm 5^\circ$ (all directions).

● Installation direction

PCB implementation type



Manifold type



7.2 High Flow Rate Measurement

D6F-P series sensor can measure high flow rate using a bypass configuration.

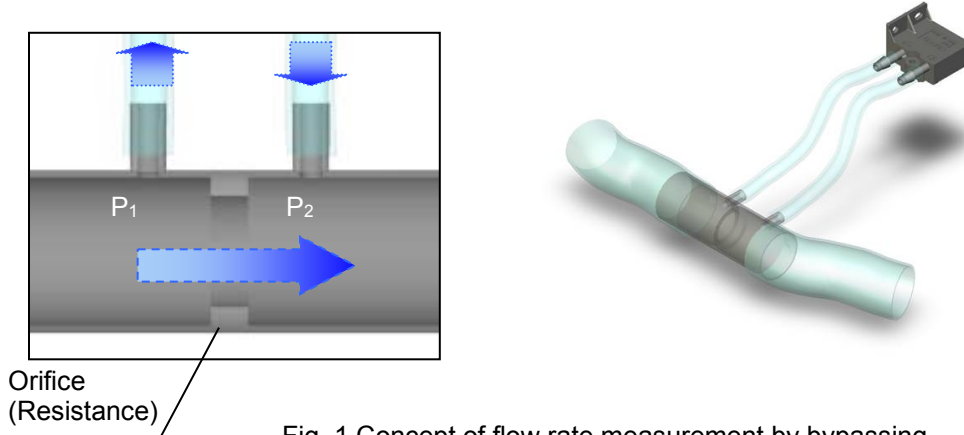


Fig. 1 Concept of flow rate measurement by bypassing

As shown in Fig.3, high flow rate can be measured by bypassing the flow to the sensor with an orifice (resistance) in the main flow path.

7.3 Orifice Diameter

Orifices are stipulated by JIS Z 8762-2:2007 (ISO 5167-2:2003).

The relationship between flow rate and pressure difference by orifice can be derived from Bernoulli's theorem.

$$Q = \alpha \varepsilon A \sqrt{\frac{2\Delta p}{\rho}}$$

where

$$\alpha = \frac{C}{\sqrt{1-\beta^4}}, \quad \varepsilon = 1 - \frac{(0.41-0.35\beta^4)\Delta p}{\kappa p_1}, \quad A = \frac{\pi}{4}d^2$$

ρ : Density, C : Runoff coefficient, β : Diameter ratio ($=d/D$), κ : Isentropic index, p_1 : Upstream pressure of orifice, d : Orifice (resistance) diameter, D : Tube diameter

As the runoff coefficient C is a function of the diameter ratio and the Reynolds number, the equation (1) requires iteration, while approximation generally uses 0.6.

Based on this, Table 6 in the next page shows the calculation result of the orifice diameter.

Note that this is only a rough estimation and that actual value must be evaluated by the customer.

Table 6 Orifice diameter (d(mm))

D6F-P0001A1

Flow rate	(L/min)	2	3	5	10	15	20
	(m³/h)	0.12	0.18	0.30	0.60	0.90	1.20
D(mm)	10	4.27	5.18	6.48	8.24	9.00	9.38
	20	4.30	5.27	6.78	9.50	11.46	12.97
	30	4.31	5.27	6.80	9.60	11.72	13.47
	40	4.31	5.27	6.81	9.62	11.77	13.57
	50	4.31	5.27	6.81	9.62	11.78	13.60


D6F-P0010A1

D6F-P0010A2

Flow rate	(L/min)	10	20	30	50	100	150
	(m³/h)	0.6	1.2	1.8	3.0	6.0	9.0
D(mm)	10	3.76	5.24	6.28	7.63	9.05	9.52
	20	3.78	5.34	6.53	8.39	11.61	13.75
	30	3.78	5.35	6.55	8.44	11.89	14.45
	40	3.78	5.35	6.55	8.45	11.94	14.58
	50	3.78	5.35	6.55	8.46	11.95	14.62

D6F-P0010AM2

Flow rate	(L/min)	10	20	30	50	100	150
	(m³/h)	0.60	1.20	1.80	3.00	6.00	9.00
D(mm)	10	2.83	3.98	4.83	6.10	7.91	8.77
	20	2.83	4.00	4.90	6.31	8.86	10.73
	30	2.83	4.00	4.90	6.32	8.93	10.91
	40	2.83	4.00	4.90	6.33	8.94	10.94
	50	2.83	4.00	4.90	6.33	8.95	10.95

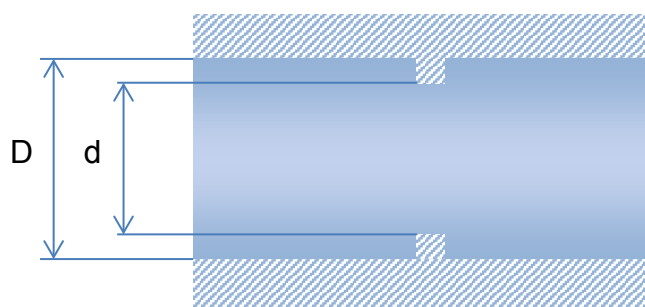

8. Troubleshooting

Q: The sensor output is nonlinear. Is there an approximate expression of output characteristics?

A: Table 7 shows the approximate expression. Note that this expression is a polynomial approximation of the representative curve.

Approximation: Flow rate = $Ax^5 + Bx^4 + Cx^3 + Dx^2 + Ex + F$ (x: Voltage)

Table 7 Approximation coefficients

	Model	
Coefficient	D6F-P0001A1	D6F-P0010A1 D6F-P0010A2 D6F-P0010AM2
A:		0.094003
B:		-0.564312
C:		1.374705
D:		-1.601495
E:	49.944	1.060657
F:	-24.864	-0.269996

Q: What happens if the flow exceeds the maximum flow rate of the sensor?

A: Output becomes maximum output of 3.1 V. The output stays at this value even if the flow rate exceeds the maximum value.

The sensor will not be broken.

Q: What happens if the flow is reversed on the sensor?

A: Output voltage becomes 0.5 V or less, and no output at 0 V.

Warranty and Limited Warranty

Thank you for using Omron Corporation ("Omron") products. The Terms and Conditions hereunder are applied to Omron products regardless of where they are purchased. When you place an order, you are expected to agree to the Terms and Conditions described below.

1. Definition

The definition of terms used in these Terms and Conditions are as follows:

- (1) Omron products: FA system equipment, general-purpose control devices, sensors, and electronic/mechanism components under Omron brand
- (2) Catalogues: Omron general catalogue, FA system equipment general catalogue, safety component general catalogue, electronic/mechanism components general catalogue and other catalogues, specifications, instructions and manuals of Omron products, including electronically provided information available on the Omron electronic components information website, etc.
- (3) Usage conditions: Usage conditions, rating, performance, operating environment, handling instructions, cautions, prohibited use, etc. of Omron products described in catalogues.
- (4) Customer application: Application of Omron products by customers which include embedding and/or using Omron products in their parts/components, electronic substrates, devices, equipment or systems manufactured by customers.
- (5) Fitness: (a) fitness, (b) performance, (c) non-infringement of third-party intellectual property, (d) compliance with laws and regulations and (e) conformity to standards.

2. Caution on Descriptions

Attention is required to the following points on descriptions in catalogues.

- (1) Rated values and performance values are the product of tests performed for separate single conditions, including but not limited to temperature and humidity. It is not intended to warrant rated values and performance values for multiple combined conditions.
- (2) Reference data are provided for reference only. Omron does NOT warrant that Omron products work properly at all time in the range of reference data.
- (3) Application examples are provided for reference only. Omron does NOT warrant the fitness of Omron products under such application.
- (4) Omron may discontinue the production of Omron products or change the specifications of them for the purpose of improving such products or other reasons entirely at its own discretion.

3. Precautions

Please be aware of and accept the following when you introduce or use Omron products:

- (1) Please use Omron products in compliance with usage conditions including rating and performance.
- (2) Please confirm fitness of Omron products in your application and use your own judgment to determine the appropriateness of using them in such application. Omron shall not warrant the fitness of Omron products in customer application.
- (3) Please confirm that Omron products are properly wired and installed for their intended use in your overall system.
- (4) When using Omron products, please make sure to (i) maintain a margin of safety vis-à-vis the published rated and performance values, (ii) design to minimize risks to customer application in case of failure of Omron products, such as introducing redundancy, (iii) introduce system-wide safety measures to notify risks to users, and (iv) conduct regular maintenance on Omron products and customer application.
- (5) Omron products are designed and manufactured as general-purpose products for use in general industrial products. They are not intended to be used in the following applications. If you are using Omron products in the following applications, Omron shall not provide any warranty for such Omron products. Even in the case of the following applications to elevator/lift equipment and medical devices, etc, some case are likely applied to an usual guarantee prescribed on next article as general-purpose products used for general industrial products. So, please contact our sales person in charge.
 - (a) Applications with stringent safety requirements, including but not limited to nuclear power control equipment, combustion equipment, aerospace equipment, railway equipment, elevator/lift equipment, amusement park equipment, medical equipment, safety devices and other applications that could cause danger/harm to people's body and life.

-
- (b) Applications that require high reliability, including but not limited to supply systems for gas, water and electricity, etc., 24 hour continuous operating systems, financial settlement systems and other applications that handle rights and property.
 - (c) Applications under severe conditions or in severe environment, including but not limited to outdoor equipment, equipment exposed to chemical contamination, equipment exposed to electromagnetic interference and equipment exposed to vibration and shocks.
 - (d) Applications under conditions and environment not described in catalogues.
 - (6) In addition to the applications listed from (a) to (d) above, Omron products are not intended for use in automotive applications (including two wheel vehicles). Please do NOT use Omron products for automotive applications. Please contact Omron sales staff for products for automotive use.

4. Warranty Terms and Conditions

The terms and conditions for warranty of Omron products are as follows:

- (1) Warranty period: One year after the purchase from Omron or Omron's agency.
- (2) Coverage: Omron will provide either of the following two services for the malfunctioning Omron products at its own discretion:
 - (a) Free repair of malfunctioning Omron products at an Omron maintenance service location (Repair service is not available for electronic/mechanism parts.), or
 - (b) Free replacement of the malfunctioning Omron products with the same number of replacement/alternative products.
- (3) Exceptions: Omron will not cover Omron products under its warranty if the cause of the malfunction falls under any of the following:
 - (a) Usage in a manner other than the original intended use for the Omron products.
 - (b) Usage outside of the usage conditions.
 - (c) Modification or repair made to the Omron products by other than Omron personnel.
 - (d) Software program embedded by other than Omron or usage of such software.
 - (e) Causes which could not have been foreseen with the level of science and technology at the time of shipping from Omron.
 - (f) Causes originating from other than Omron or Omron products (including force majeure such as but not limited to natural disasters).

5. Limitation of Liability

The warranty set out in these Terms and Conditions is the whole and sole liability for Omron products. There are no other warranties, expressed or implied. Omron and the distributors of Omron products are not liable for any damages which may arise from or be related to Omron products.

6. Export Controls

Customers of Omron products shall comply with all applicable laws and regulations of Japan and/or other relevant countries with regard to security export control, when exporting Omron products and/or technical documents or providing such products and/or documents to a non-resident. Omron may not provide customers with Omron products and/or technical documents should they fail to comply with such laws and regulations.

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Electronic and Mechanical Components Company

Regional Contact

Americas

<https://www.components.omron.com/>

Asia-Pacific

<https://ecb.omron.com.sg/>

Korea

<https://www.omron-ecb.co.kr/>

Europe

<http://components.omron.eu/>

China

<https://www.ecb.omron.com.cn/>

Japan

<https://www.omron.co.jp/ecb/>