





ScienceDirect

Nuclear Instruments and Methods in Physics
Research Section A: Accelerators, Spectrometers,
Detectors and Associated Equipment

Volume 508, Issues 1–2, 1 August 2003, Pages 34–37

Optical study of the features of the streamer images in RPC

K. Abe ^a, Y. Hoshi ^a  , K. Kumagai ^a, T. Nagamine ^b, K. Neichi ^c, K. Onodera ^a, N. Takahashi ^a, T. Takahashi ^a, A. Yamaguchi ^b, H. Yuta ^d

Show more 

 Outline |  Share  Cite

[https://doi.org/10.1016/S0168-9002\(03\)01273-7](https://doi.org/10.1016/S0168-9002(03)01273-7) 

[Get rights and content](#) 

Full text access

Abstract

Optical images of the streamer from a Resistive Plate Chamber (RPC) are observed using a transparent high-voltage electrode in the operation of streamer mode. The optical images are measured using CCD camera system in mixture Ar/C₄H₁₀ with and without C₂H₂F₄. Area of typical streamer image is approximately **12mm²** in both gas mixtures with its surrounding halo of 2–**4mm** in diameter. We also observed the quenching effect of C₄H₁₀ and C₂H₂F₄ on the optical image in the chamber.

 Previous

Next 

PACS

29.40.Cs

Keywords

RPC; CCD camera; Streamer; C₂H₂F₄

1. Introduction

Resistive Plate Chamber (RPC), first made by Santonico and Cardarelli in early 1980s [1], is a particle detector with two parallel plate electrodes and it has many attractive features for high-energy experiments, because of high efficiency, good time resolution, tracking capability and low cost. These features have naturally led the BELLE collaboration to choose a large size of the glass RPC for the detection of K_L^0 and muon in the B meson decay product in the BELLE experiment at KEK [2], [3], [4].


The previous works for RPC gas mixture are primarily based on Ar together with C_4H_{10} and CF_3Br as photon and electron quenchers [5], [6]. Recently, for environmental reasons, CF_3Br has been replaced by tetrafluoroethane ($C_2H_2F_4$), giving the satisfactory results for the particle detectors [5]. $C_2H_2F_4$ is characterized by sufficiently high electron affinity and negligible ozone depletion power. However, its Global Warming Potential (GWP) is 1300 times higher than carbon dioxide (CO_2); thus, use of freon gas would possibly be prohibited in the near future. From this point of view, we started our investigation to test the gas mixture of Ar/ C_4H_{10} with and without $C_2H_2F_4$ as a function of Ar fraction.

A study of streamer images can give information on the spatial distribution of charge on the electrode, which is useful to design the reading pad width of RPCs for an experiment. In order to obtain information on streamer size, we have made a RPC with two transparent high voltage glass electrodes using transparent conductive paint. We have observed the images of the streamers in the gap between the two glass electrodes using a CCD camera with an image intensifier. We have also measured electrically induced signal from a pickup pad placed on one side of the glass RPC.

In this paper, we will report the results of the study of the properties of the optical images in mixture Ar/ C_4H_{10} with and without $C_2H_2F_4$ in the glass RPC.

2. RPC and CCD camera system

The RPC electrodes were made of **2mm** thick float glass plates commercially produced as window glass. Their surface and volume resistivities are $\sim 10^{12} \Omega/\square$ and $5 \times 10^{12} \Omega \text{cm}$, respectively. The outer surfaces of the glass plate electrodes are coated by a brush with the transparent conductive paint, ET-680(Oshar Coat) [7]. ET-680 is made of acrylic resin with metal chelating which makes it conductive. Its surface resistivity is $10^7 - 10^9 \Omega/\square$, after it is dried. The surface resistivity of the paint was measured to be $(2-3) \times 10^8 \Omega/\square$. The frame of the RPC is made of PVC. The gas gap is **2mm**. The RPC is **11×3cm**, attached with the copper pickup pad of the same size. A mass flow controller is used to regulate the gas mixture. The total gas flow rate was set to about **10cm³/min**. Fig. 1 shows a block diagram of the setup for three-dimensional (3D) streamer image measurement. The RPC is housed with mirror in a light shielded box. The mirror is used for recording of 3D images between the two electrodes. In order to obtain individual images of streamer, we used two different types of image intensifier, Hamamatsu high speed image intensifier Model-C4273 and Hamamatsu Model-C6653 with a Hamamatsu **50mm** F3.5 UV lens, optically connected with each other in tandem. The images are stored at a phosphor plate built in the second stage image intensifier, Model-C6653, of which high voltage is always applied for measurement. The images on the phosphor plate are continuously taken by a CCD camera Hamamatsu C3077, which consists of 768×493 matrix elements (pixels) with area of **11.0×13.0μm**. The images from the CCD camera were sent to a Video Frame Grabber, Hamamatsu C7489, to analyze the streamer image properties.

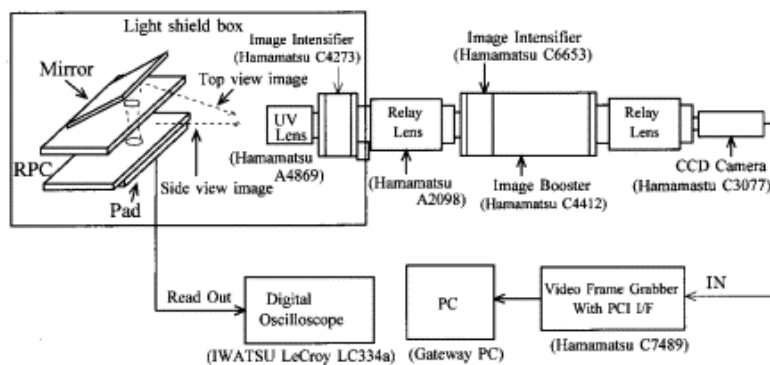

[Download: Download high-res image \(91KB\)](#)

[Download: Download full-size image](#)

Fig. 1. CCD Camera System.

3. Results and discussion


Since we used cosmic rays for the counting system of this small size RPC, we could not have enough coincidence rate to find the operating high voltage for the RPC. Thus, we measure the single (non-coincidence) counts and set the high voltages for 12 sets of the gas mixtures using the relation of the coincidence and single count rates obtained from the previous report [8]. Table 1 lists the operating voltages and the Ar gas fractions for the 12 gas mixtures.

Table 1. Parameter for the gas mixtures used in this experiment

Ar/C ₄ H ₁₀ /C ₂ H ₂ F ₄ (%)	Op. HV (kV)	Ar/C ₄ H ₁₀ (%)	Op. HV (kV)
81.8/10/8.2	5.0	80/20	5.6
75/10/15	6.0	75/25	6.4
60/10/30	7.0	66.6/33.3	7.0
45/10/45	7.8	50/50	8.4
30/10/60	8.8	33.3/66.6	9.8
18/10/72	9.2	25/75	10.4

Op. ; Operating high voltage in this experiment.

To identify the image and the signal pulse from the same streamer, we used the times of the built-in clocks in the digital oscilloscope and the PC and made correspondence among the images and signal pulses. Fig. 2 shows the typical examples of streamer images (left) and the oscilloscope views of the corresponding pulses (right), operated with Ar/C₄H₁₀ and Ar/C₄H₁₀/C₂H₂F₄ gas mixtures. The top and side views are taken in a single view as indicated in Fig. 2. Each top view shows the round shape spot corresponding to the streamer image, together with scattered small spots all over the view. The scattered spots could possibly come from electric noises, because no after-pulse is observed in the oscilloscope view.

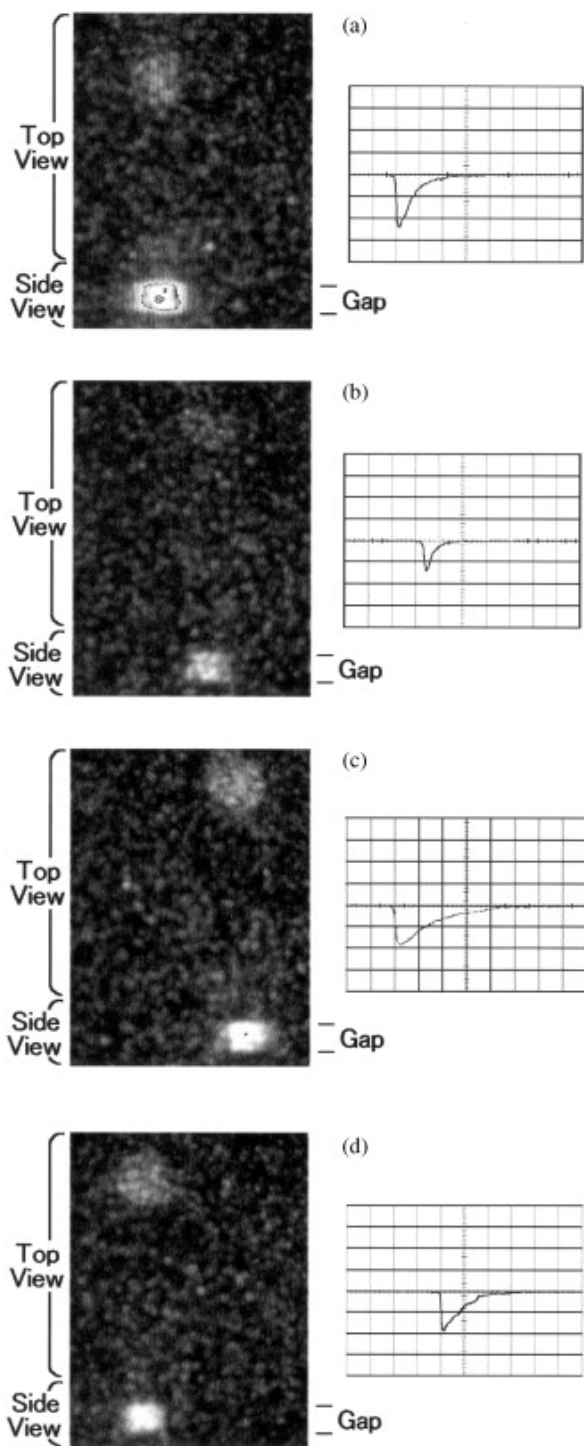


[Download: Download high-res image \(1MB\)](#)

[Download: Download full-size image](#)

Fig. 2. Typical single streamer image (left) and corresponding pulse (right), The oscilloscope scale is **50ns/div** by **50mV/div**: (a) for Ar/C₄H₁₀/C₂H₂F₄=81.8/10/8.2, (b) for Ar/C₄H₁₀/C₂H₂F₄=18/10/72, (c) for Ar/C₄H₁₀=80/20 and (d) Ar/C₄H₁₀=25/75.

The image in the side view is the direct view of the streamer through the **2mm** gap in the RPC limited to the gap size. The image in the top view is a round shape observed through the float glass electrode with approximately **4mm** diameter. The diameter of the visible streamer images was measured by Hamamatsu Video Frame Grabber. [Fig. 3](#) shows the effective diameters of the images in the top and side views which stay constant within measurement error. The streamer diameter from top view is measured to be an average of major and minor axes of the round images.

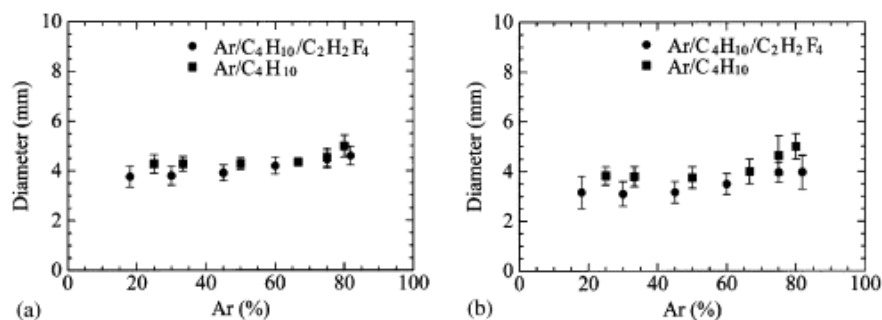


[Download: Download high-res image \(59KB\)](#)

[Download: Download full-size image](#)

Fig. 3. Effective diameter of streamer image.

Fig. 4 shows the brightness of the top and side view images, which was recorded in the Video Frame Grabber. The brightness of the top view is very weak compared with the side view brightness, because the float glass absorbs strongly UV photons from the Ar photoionization emission in the streamer. The brightness in Fig. 4(b) shows a linear rise for Ar fraction of more than 50% in C₂H₂F₄ mixture. This could be due to the reduction of C₂H₂F₄ which decreases the quenching effect as the Ar fraction increases.

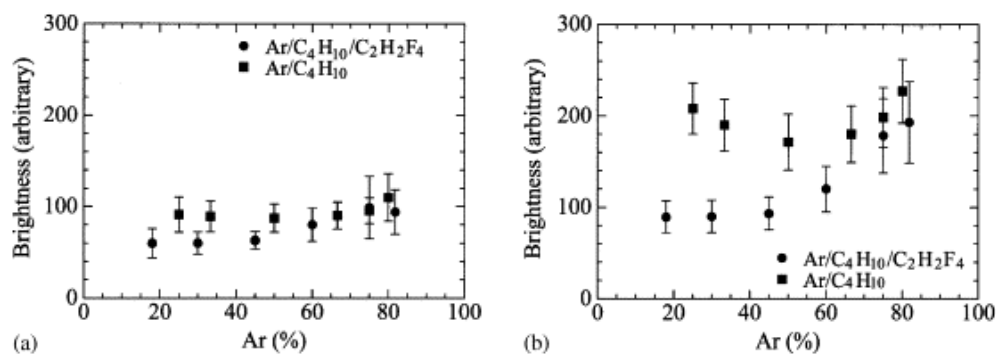

[Download: Download high-res image \(77KB\)](#)

[Download: Download full-size image](#)


Fig. 4. Brightness of streamer image.

4. Summary

We made a RPC with transparent float glass electrodes, using transparent conductive paint, and observed the optical images of the streamer in mixture Ar/C₄H₁₀ with and without C₂H₂F₄. Each image has a central spot corresponding to the streamers with small scattered spots all over the view. The effective diameter of the images is approximately **4mm** and show no change even if Ar fraction increases. A typical streamer area of the top and side view images is approximately **12mm²** with halo for the mixtures of Ar/C₄H₁₀ with and without C₂H₂F₄. The increase of the streamer brightness observed with C₂H₂F₄ gas mixture can be explained by the reduction of the quenching effect as C₂H₂F₄ decreases.

[Special issue articles](#) [Recommended articles](#)

References

- [1] R. Santonico, R. Cardarelli
Nucl. Instr. and Meth. A, 187 (1981), p. 377
 [View PDF](#) [View article](#) [View in Scopus](#) ↗
 - [2] BELLE Collaboration, KEK Report 95-1 April 1995.
[Google Scholar](#) ↗
 - [3] K. Abe, *et al.*
IEEE Trans. Nucl. Sci., NS-46 (6) (1999), p. 2017
[View in Scopus](#) ↗
 - [4] K. Abe, *et al.*
IEEE Trans. Nucl. Sci., NS-47 (6) (2000), p. 1748
[View in Scopus](#) ↗
 - [5] M. Sanpei, *et al.*
IEEE Trans. Nucl. Sci., NS-44 (3) (1997), p. 752
[View in Scopus](#) ↗
 - [6] S. Narita, *et al.*
IEEE Trans. Nucl. Sci., NS-48 (3) (2001), p. 893
[View in Scopus](#) ↗
 - [7] Y. Inoue, *et al.*
Nucl. Instr. and Meth. A, 394 (1997), p. 65
 [View PDF](#) [View article](#) [View in Scopus](#) ↗
 - [8] S. Narita, *et al.*, IEEE 2000 Nuclear Science Symposium, 2000, Oct. Lyon France.
[Google Scholar](#) ↗
-

Cited by (6)

Streamer studies in Resistive Plate Chambers

2011, Nuclear Instruments and Methods in Physics Research Section A Accelerators Spectrometers Detectors and Associated Equipment

[Show abstract](#) ✓

Quenching properties of gas mixture in glass RPC operated with streamer mode

2004, Nuclear Instruments and Methods in Physics Research Section A Accelerators Spectrometers Detectors and Associated Equipment

[Show abstract](#) ✓

Induced charge profile in a glass RPC operated in avalanche mode ↗

2013, IEEE Transactions on Nuclear Science

[Induced charge profile in glass RPC operated in avalanche mode ↗](#)

2012, IEEE Nuclear Science Symposium Conference Record

[Measurements of induced charge profile in RPC with submilli-strips ↗](#)

2010, IEEE Transactions on Nuclear Science

[Measurements of streamer and avalanche size by using RPC with submilli-strip ↗](#)

2008, IEEE Nuclear Science Symposium Conference Record

[View Abstract](#)

Copyright © 2003 Elsevier Science B.V. All rights reserved.



All content on this site: Copyright © 2025 Elsevier B.V., its licensors, and contributors. All rights are reserved, including those for text and data mining, AI training, and similar technologies. For all open access content, the relevant licensing terms apply.

