
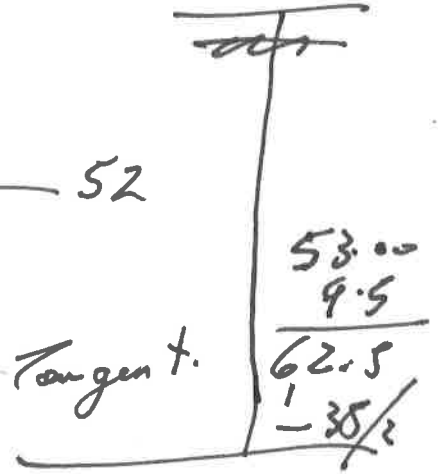


Assembly tool for Fla. to barb fittings.

①


Main body

$$\begin{array}{r} 38.4 \\ 7. \\ 7. \\ \hline 52.4 \\ 2 \end{array}$$


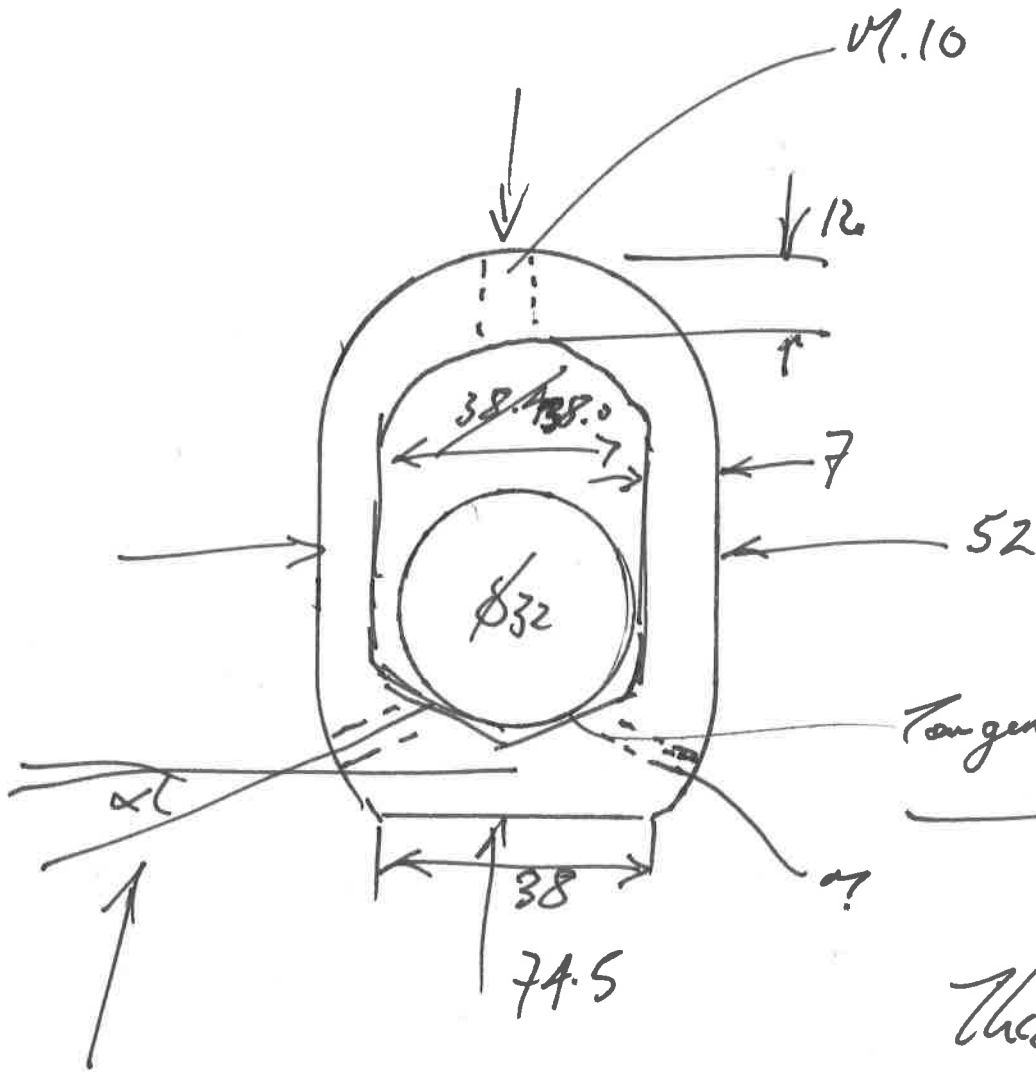


Thickness in
 $Z = 38 \text{ mm}$


$\alpha = ?$

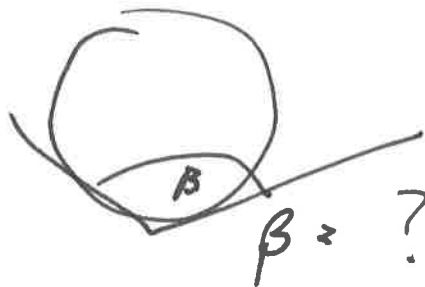

2

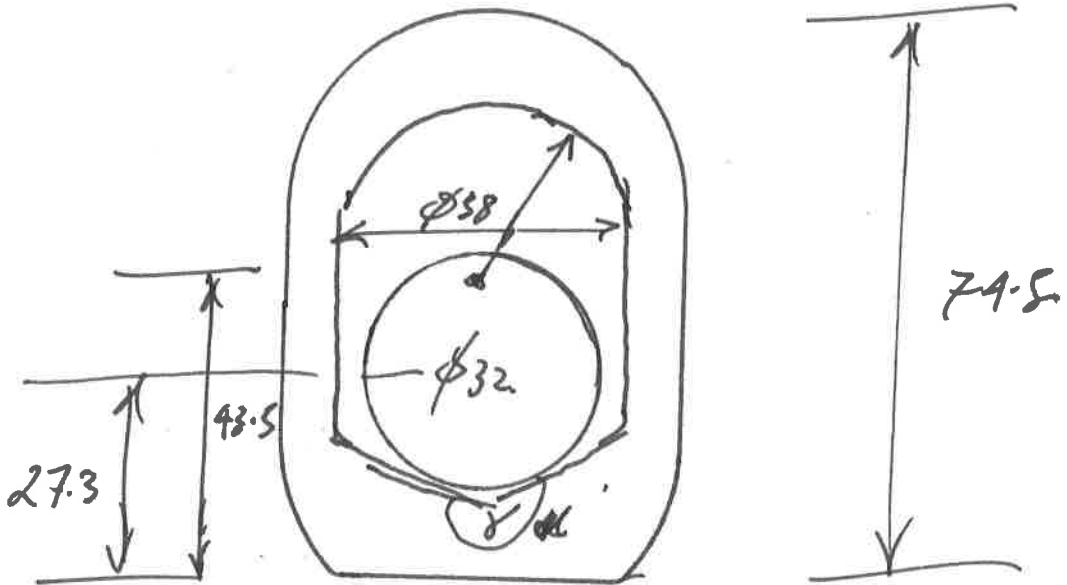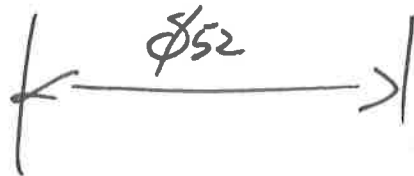


5

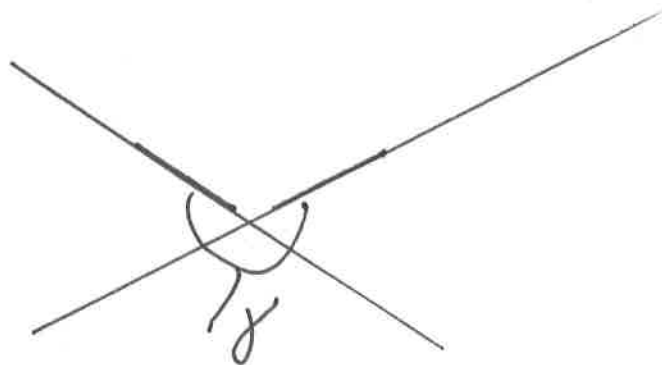

3

$$(18.75 + 7.7 + 12)$$

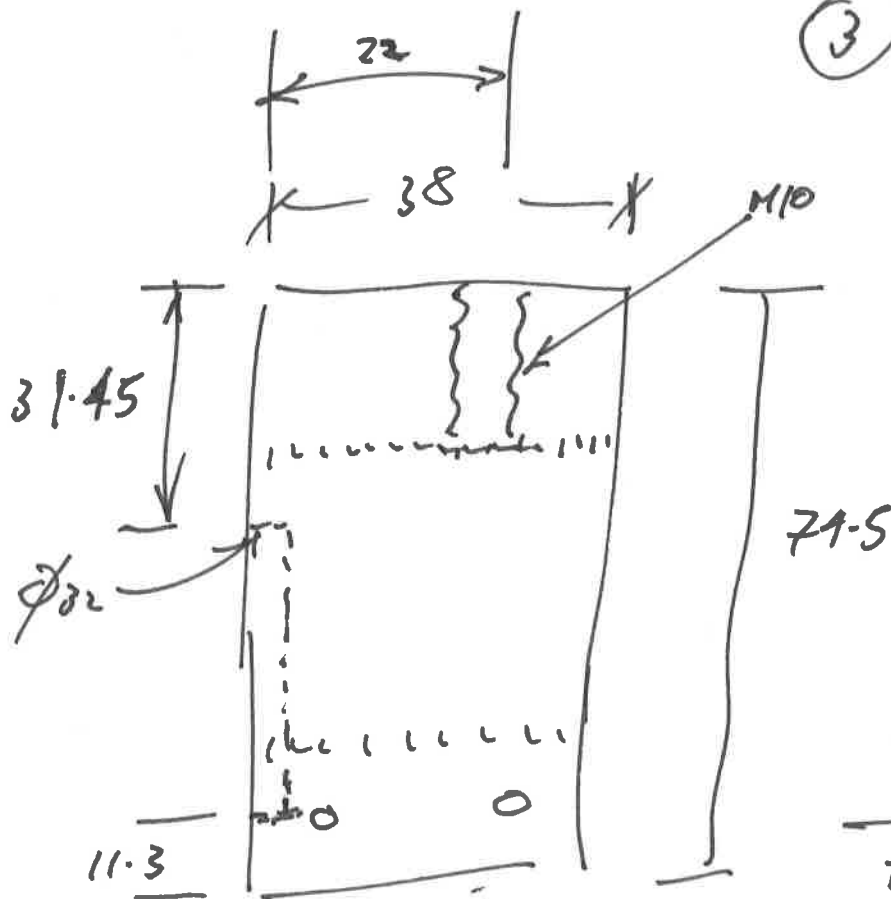


$$\begin{array}{r} 3.85 \\ 2 \overline{) 7.70} \end{array}$$

$$\begin{array}{r} 31.45 \\ 32.00 \\ 11.3 \\ \hline 74.75 \end{array}$$

Really

16
27.3

A-section
and ϕ

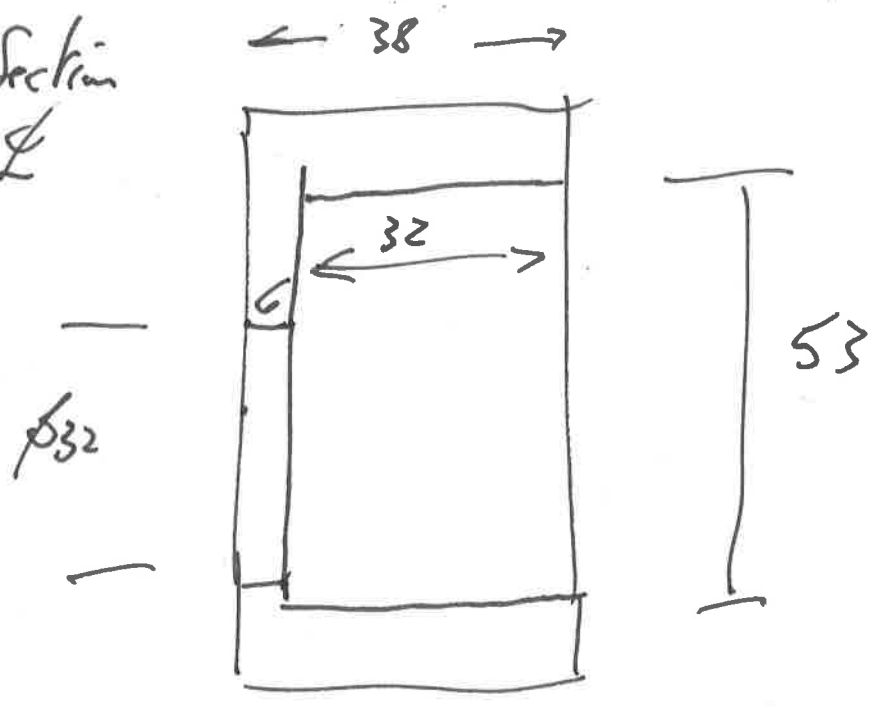

$$\begin{array}{r} 18.75 \\ 3.85 \\ \hline 22.60 \\ 11.1 \end{array}$$

$$\begin{array}{r} 12.00 \\ 3.85 \end{array}$$

$$\begin{array}{r} 15.85 \\ 22.60 \end{array}$$

$$\begin{array}{r} 27.38.45 \\ \hline \text{Really } 38.2 \end{array}$$




Assembly Tool for R&B to S. Fittings. Thrust Bloc.

7.06
6.38/2



R =

Thickness = 31.8.
T. fit 32.0

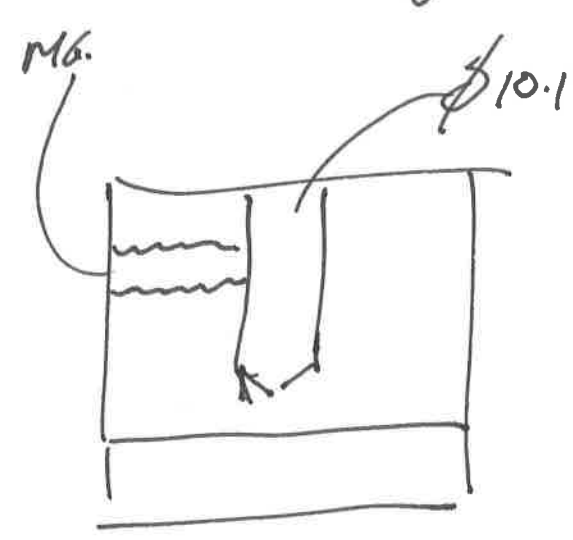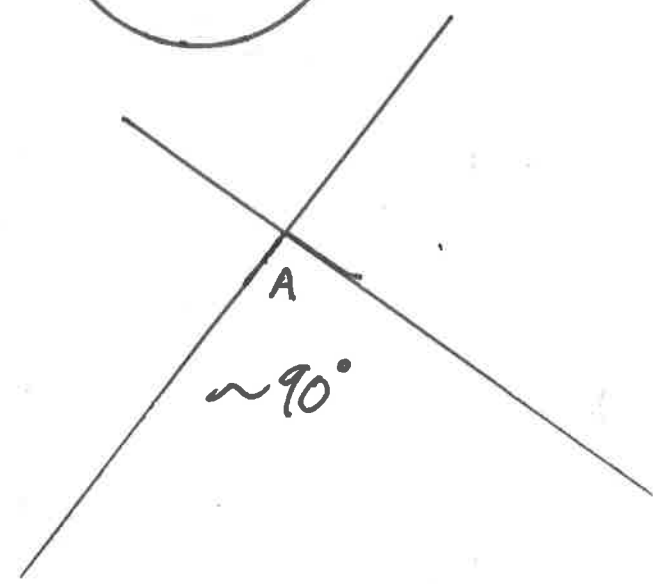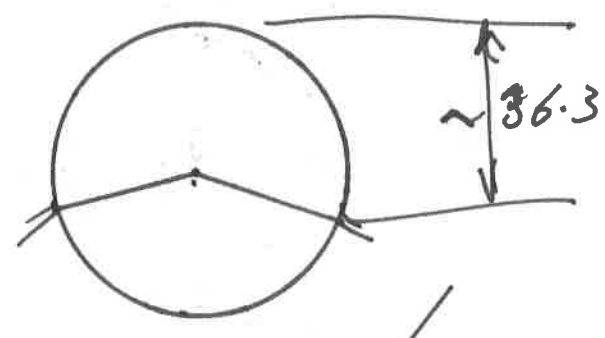

| 31.8 |

Assembly Tool for pipe to B. fittings

Threaded Piston for Vacuum.

