Cable radiation quality control: why and how?

Ruben García Alía

October 8th 2020

https://indico.cern.ch/event/958625/









Why is radiation quality control for cables important?

 Insulating materials degrade due to radiation, up to a point in which the insulating properties are lost

Input by Helmut Vincke, linked to high-level dosimetry activity




Dose levels above which permanent material/equipment damage is expected

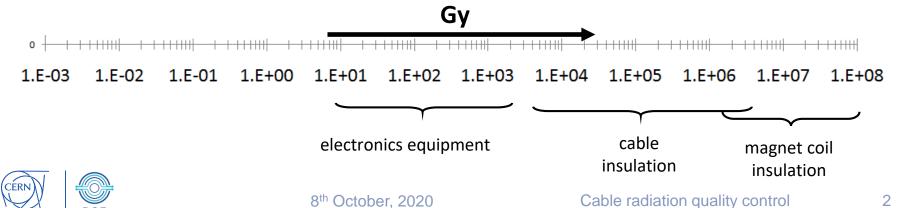


Why is radiation quality control for cables important? (II)

Giuseppe Lerner, HL-LHC annual meeting (2019)

- In HL-LHC, significant portions of the LHC tunnel (notably near IP1 and IP5) will be exposed to radiation levels that pose a threat to cable insulating materials
- Radiation values shown for cable tray location can be significantly larger closer to beamline/equipment

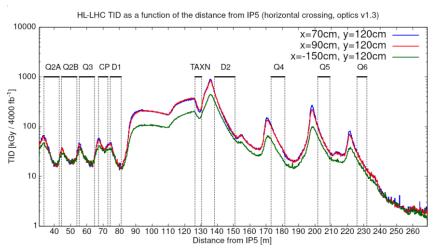







How can cable radiation quality control be performed?

Procurement specifications

- Presently, this is specified via IS23 Safety Instruction, with two possible radiation tolerance categories:
 - General purpose: up to 500 kGy
 - Radiation resistant: up to 10 MGy (significantly more expensive)
- Radiation tolerances are specified as demonstrated in **accelerated irradiation**. At lower dose rates (i.e. dose absorbed in operation), radiation damage can be significantly worst due to synergies with other environmental strains
- Therefore, a **factor 5** applies to convert from demonstrated dose tolerance in accelerated tests to actual levels in operation (as per "Clarification for referencing to IS23 Rev3 and IS41 when writing technical specifications for cable purchasing", EDMS 1495561)
- According to the categorization above, a significant fraction of HL-LHC LSS1 and LSS5 cables would need to be radiation resistant





How can cable radiation quality control be performed? (II)

Radiation testing

- It is very difficult to know a priori whether a certain insulating material will be compliant with the specified radiation tolerance (e.g. 10 MGy), mainly due to:
 - The lack of recent systematic testing of such materials;
 - The strong dependence of the radiation response to the detailed material composition (e.g. additives, etc.) which is typically not disclosed by the manufacturers.
- Therefore, at least in first instance, radiation testing would be needed performed. As
 cable manufacturers do not have experience in materials irradiation (nor access to
 facilities), this would need to be performed by CERN.
- Key ingredients for testing:
 - Well established and systematic test procedure
 - Regular access to a suitable irradiation facility
 - Resources (instrumentation, person-power) and know-how for post irradiation analysis
 - Guarantee that irradiated samples are representative of what is installed in the machines





How can cable radiation quality control be performed? (III)

- Key ingredients for testing:
 - Well established and systematic test procedure
 - Regular access to a suitable irradiation facility
 - Resources (instrumentation, person-power) and knowhow for post irradiation analysis
 - Guarantee that irradiated samples are representative of what is installed in the machines
- Main solution: IEC 60544 international standard
 - Scope: "This part of IEC 60544 provides a classification system that serves as a guide for the selection and indexing of insulating materials intended to serve in the radiation environment of nuclear reactor facilities, reactor fuel-processing facilities, irradiation facilities, particle accelerators, and X-ray apparatus."



IEC 60544-2

Edition 3.0 2012-07

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Electrical insulating materials – Determination of the effects of ionizing radiation on insulating materials –

Part 2: Procedures for irradiation and test

Matériaux isolants électriques – détermination des effets des rayonnements lonisants sur les matériaux isolants –

Partie 2: Méthodes d'irradiation et d'essai





How can cable radiation quality control be performed? (IV)

• Example of cable irradiation (and importance of **end point criterion** and **dose rate**)

"Absorbed doses and radiation damage during the 11 years of LEP operation" H. Schonbacher (CERN), M. Tavlet(CERN) Published in: Nucl.Instrum.Meth.B 217 (2004) 77-96

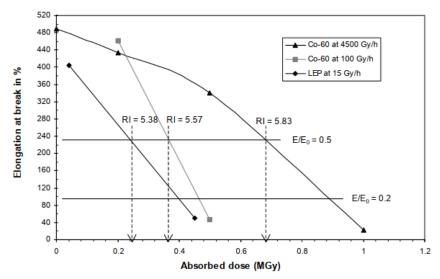



Fig. 4: Decrease of elongation at break of a cable sheathing VAC material C 995, as a function of the absorbed dose, at different dose rates.





How can cable radiation quality control be performed? (V)

- Key ingredients for testing:
 - Well established and systematic test procedure
 - Regular access to a suitable irradiation facility
 - Resources (instrumentation, person-power) and knowhow for post irradiation analysis
 - Guarantee that irradiated samples are representative of what is installed in the machines
- CERN has access to high dose rate (~30 kGy/h) gamma irradiation facilities through contract B1642/EN ("Supply of Irradiation Tests")
- At CERN, the activity is coordinated through the R2M work package of the R2E project. The technical responsible is Matteo.Ferrari.2@cern.ch.




BGS conveyor





How can cable radiation quality control be performed? (VI)

- Key ingredients for testing:
 - Well established and systematic test procedure
 - Regular access to a suitable irradiation facility
 - Resources (instrumentation, person-power) and know-how for post irradiation analysis
 - Guarantee that irradiated samples are representative of what is installed in the machines
- Cable post (and pre) irradiation testing performed by CARE project (responsible: José Gascón), not only in scope of radiation damage, but as more general quality control
- For representativeness of irradiation samples, traceability needs to be ensured by manufacturer/distributor of cables







Summary

- Radiation damage in cables is a risk for HL-LHC operation, owing to:
 - The large radiation and levels and;
 - The lack of knowledge of the response of cable insulating materials presently available on the market to such radiation levels.
- Not much can be done about the first point, but for the second, **systematic radiation testing** is the only solution to select suitable materials, and discard weak ones
- Systematic radiation testing needs to be traded off against the **risk acceptance** of installing non-tested cables, and the related consequences (e.g. need of replacing cables in non-programmed or highly conservative time intervals, etc.)
 - Indeed, we can hope to "be lucky" and not experience significant degradation of cables in HL-LHC, but this would (to my knowledge) be more "wishful thinking" than a well-based expectation
 - An intermediate solution could be to monitor the radiation damage in situ, and plan cable replacement accordingly
- If systematic radiation tests are to be implement, CERN has the necessary ingredients in place: available test standard, access to irradiation facilities and related service, and postirradiation cable testing





Some references (procedural, mainly from RIAC)

- SAFETY INSTRUCTION NORDM; 23 (IS 23 REV. 3)
- REVISED SAFETY INSTRUCTION 41 (IS41 REV.)
- "Clarification for referencing to IS23 Rev3 and IS41 when writing technical specifications for cable purchasing" (guideline)
- "Working Group on the Replacement of Irradiated and Ageing Cables" (final report)
- "LHC & SPS Cable Samples/Sampling Procedure"
- « Processus de décision du remplacement des câbles irradiés »
- IEC 60544 Part 2: Electrical insulating materials Procedures for irradiation and test
- IEC 60544 Part 4: Electrical insulating materials Classification system for service in radiation environments
- IEC 61244 Technical Report: Effects of different temperatures and dose rates under radiation conditions





Some references (technical/scientific)

- Tavlet, Marc. "Effects of ageing of electrical insulators after exposure for 11 years in the large electron—positron collider at CERN." Nuclear Instruments and Methods in Physics Research Section B: Beam Interactions with Materials and Atoms 208 (2003): 476-479.
- Schönbacher, H., and M. Tavlet. "Absorbed doses and radiation damage during the 11 years of LEP operation." Nuclear Instruments and Methods in Physics Research Section B: Beam Interactions with Materials and Atoms 217.1 (2004): 77-96.
- Chapiro, A., et al. "What is ageing? Are there still problems to be solved?." *Nuclear Instruments and Methods in Physics Research Section B: Beam Interactions with Materials and Atoms* 131.1-4 (1997): x-xii.
- Perrin, Sh, et al. "Evaluation of the radiation resistance of electrical insulation materials." *Nuclear Instruments and Methods in Physics Research Section B: Beam Interactions with Materials and Atoms* 198.1-2 (2002): 77-82.
- Plaček, V., et al. "Dose rate effects in radiation degradation of polymer-based cable materials." *Nuclear Instruments and Methods in Physics Research Section B: Beam Interactions with Materials and Atoms* 208 (2003): 448-453.
- Radiation Damage to Organic Materials in Nuclear Reactors and Radiation Environments (Proceedings of a Final Research Co-ordination Meeting, Takasaki, Japan, 17-20 July 1989)
- Clough, Roger L., and Shalaby W. Shalaby. "Radiation effects on polymers." (1991).



